# 900 SERIES DOUBLE HUNG







565 Cedar Way • Oakmont, PA 15139 • 1-800-424-3573 • www.chelseabuildingproducts.com



# 900 SERIES DOUBLE HUNG

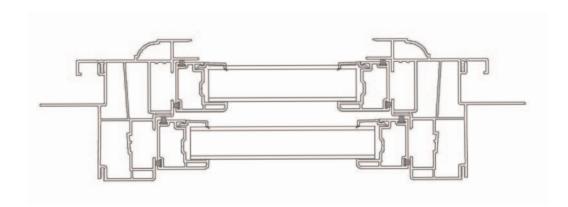

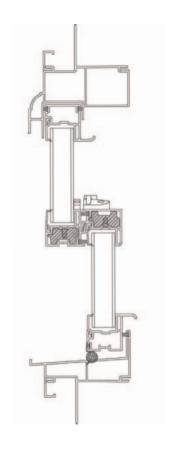

# 900 Series Features

- Models include: Double Hung, Single Hung, Two- and Three-lite Horizontal Slider (XO, XX, XOX), Tilt n Slide and Picture Window.
- Fusion welded sash and frame corners assure that this window stays true and square, and fits the rough opening.
- Available in replacement and new construction configurations. For ease of new construction installation, it comes with a pre-punched nailing fin.
- Subtle accessory grooves come standard so you can securely accommodate trim and other attachments. Multiple accessories available.
- Accepts 3/4" and 7/8" insulated glass.
- Sash options include: Standard non-equal lite, equal lite and Heritage sash/non-equal lite.
- T-mull available for multi-window configurations.

- The optional Structural Mull system adds additional strength to multiple window combinations.
- The contoured millwork frame offers an intricate exterior design with great aesthetics.
- Dual Weatherstripping at stiles, interlock and sill provides extra protection against air-infiltration which enhances energy efficiency.
- Utilizes Chelsea's Ccore® composite reinforcement.
- Meets AAMA Grade R35 structural test standards with upgrades available to meet Grade LC55.
- The Double Hung and Picture Window meet Missile Level D and Wind Zone 3 Impact test rating in accordance with ASTM E 1886-05 and ASTM E 1996-05.

# Performance Results

### <u>Structural</u>

Test Standard - AAMA/WDMA/CSA 101/I.S.2/A440-05 Tested to H Class R35 (40" x 63")
Test Standard - AAMA/WDMA/CSA 101/I.S.2/A440-11 NAFS Tested to H Class LC50 (40" x 63") Tested to H Class LC55 (44" x 75")

## **Thermal**

The 900 is capable of a U-Factor result of 0.17 The 900 performs to a SHG result with a range from 0.15 to 0.58

Part of the DuraTrust family of products.





©2017CBP 900DH-DT-5-17